
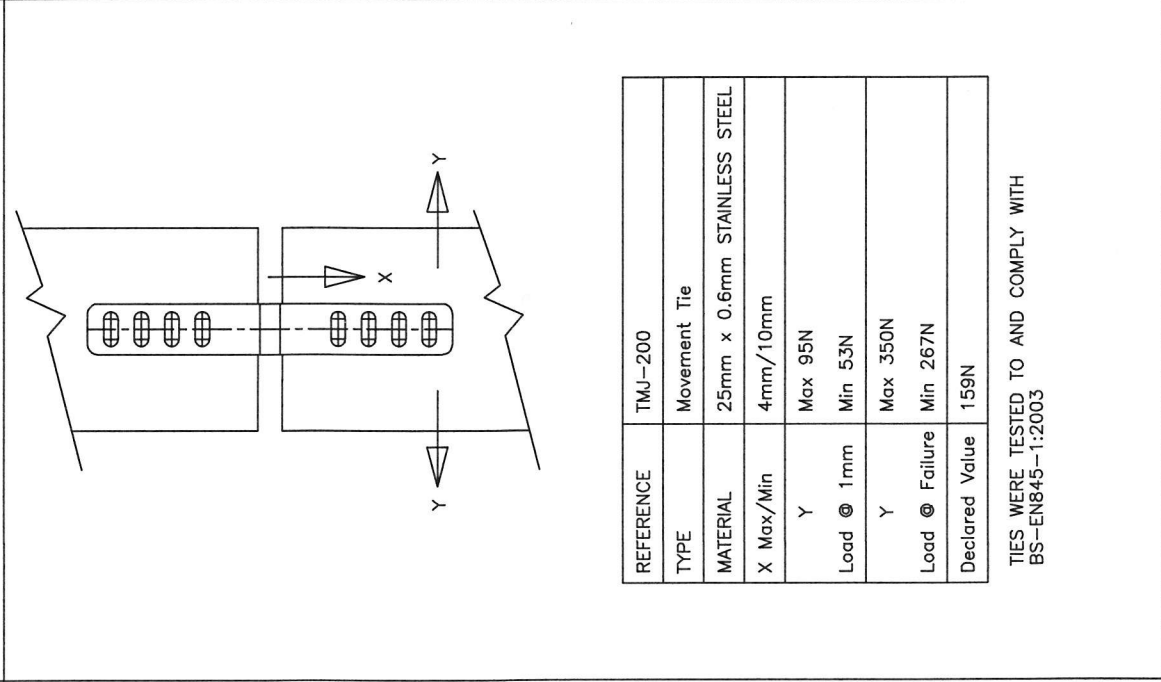




REFERENCE	SMJ-200
TYPE	Movement Tie
MATERIAL	25mm x 0.6mm STAINLESS STEEL
X Max/Min	4mm/10mm
Y	Max 95N
Load @ 1mm	Min 53N
Y	Max 350N
Load @ Failure	Min 267N
Declared Value	159N

TIES WERE TESTED TO AND COMPLY WITH
BS-EN845-1:2003

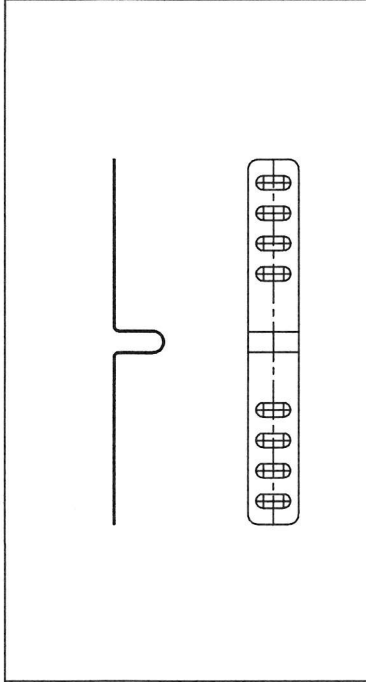

REFERENCE	TMJ-200
TYPE	Movement Tie
MATERIAL	25mm x 0.6mm STAINLESS STEEL
X Max/Min	4mm/10mm
Y	Max 95N
Load @ 1mm	Min 53N
Y	Max 350N
Load @ Failure	Min 267N
Declared Value	159N

TIES WERE TESTED TO AND COMPLY WITH
BS-EN845-1:2003

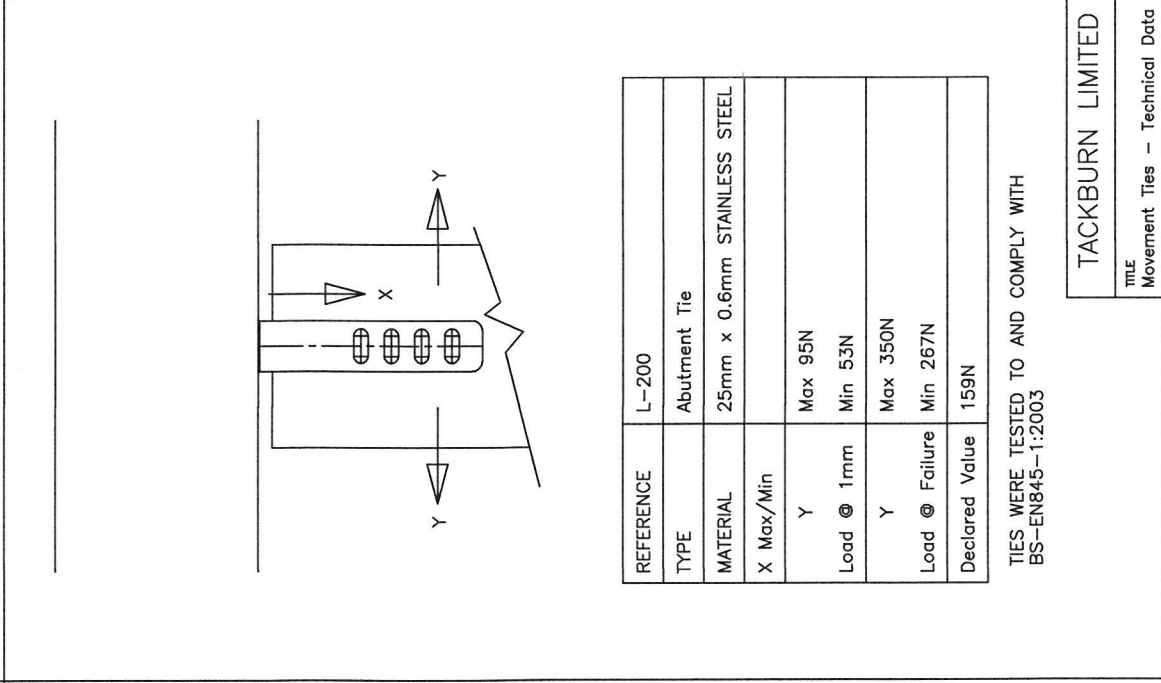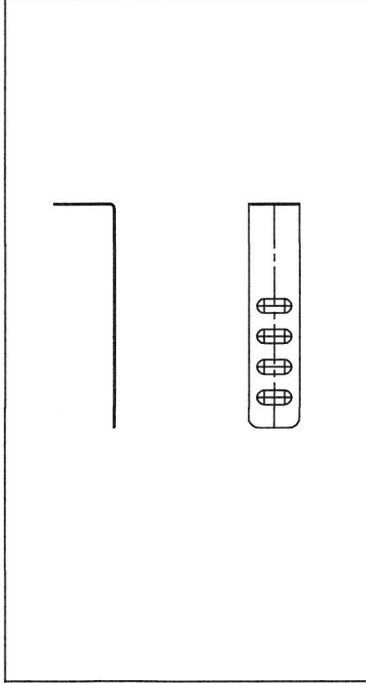

REFERENCE	L-200
TYPE	Abutment Tie
MATERIAL	25mm x 0.6mm STAINLESS STEEL
X Max/Min	
Y	Max 95N
Load @ 1mm	Min 53N
Y	Max 350N
Load @ Failure	Min 267N
Declared Value	159N

TIES WERE TESTED TO AND COMPLY WITH
BS-EN845-1:2003